

- 5.7" TFT Colour Touchscreen
- 65,535 Colours, VGA (640 x 480)
- MicroSD™ Data storage upto 32GB
- Real Time Clock
- 1 CAN Port, 3 RS-232 / RS-485
- 1 Integral Ethernet Port
- USB Port for Programming
- USB Port for Flash Drives upto 2TB
- Addressable function keys
- 1MB RAM (Program), 27MB (Graphical)
- IP65 (NEMA4)
- 10 - 30 VDC Power Supply
- Online Programming
- Free Configuration Software
- Remote I/O Communication
- Optional - Modem (SMS, GSM, GPRS)



Options & Ordering Codes

Standard Options	DI	DO	AI	AO
i3CX12Z/10D03-SEHF	12	6 Relay	4	-
i3CX12Z/13C14-SEHF	12	12	2*	2
i3CX12Z/20B05-SEHF	24	16	2	-
i3CX12Z/10B04-SEHF	12	12	2	-
i3CX12Z/10E24-SEHF	12	12	6*	4
i3CX12Z/00000-SEHF	-	-	-	-

* Universal Analogue Inputs

i3	CX	12	Z	/	10	D	0	3	-	S	E	H	F
Colour Display								Digital Outputs					
640 x 480								0	No Digital Output				
		CX						3	6 (Relay)				
								4	12 (DC)				
								5	16 (DC)				
Comms Ports								Analogue Outputs					
RS-232, RS-485, RS-232/485		12					0	No Analogue Output		Serial	In-built Ethernet and CAN port		MicroSD™ Flash Card
Programmable Keys							1	2 (12 Bit)					
5 Programmable Keys			Z				2	4 (12 Bit)					
Digital Inputs							Analogue Inputs						
No Digital Input					00	0	No Analogue Input				iCAN	H	
12 Digital Inputs					10	B	2 (12 Bit)				CANopen	A	
24 Digital Inputs					20	C	2 (14 Bit)				Devicenet	D	
12 Digital Inputs + Temperature PT100/TC					13	D	4 (12 Bit)				J1939	J	
						E	6 (14/17 Bit)						

i³CX Intelligent Control Station

Technical Specifications

General Specifications	
Required Power (Steady State)	420mA @ 12VDC / 230mA @ 24VDC
Required Power (Inrush)	25A for <1ms @ 24VDC DC Switched
Primary Voltage Range	10-30VDC
Relative Humidity	5 to 95% Non-Condensing
Clock Accuracy	+/-20ppm Maximum at 25°C (+/-1 Minute per month)
Operating Air Temperature	-10°C to +60°C
Storage Temperature	-40°C to +60°C
Weight	0.70kg (without I/O)
Approvals	cUL, UL, CE

Display Specifications	
Display Type	5.7" VGA TFT
Resolution	640 x 480
Colour	16-bit (65,536)
Screen Memory	27MB
User-Programmable Screens	1023
Backlight	LED - 30,000 hour life
Screen Update Rate	User configurable within the scan time (perceived as instantaneous in many cases)

Control & Logic Specifications	
Control Language Support	Advanced Ladder Logic Full IEC 61131-3
Logic Program Size & Logic Scan Rate	1MB Maximum 0.013ms/k
Online Programming Changes	Supported in Advanced Ladder
I/O Support	Digital Inputs - 2048
	Digital Outputs - 2048
	Analogue Inputs - 512
	Analogue Outputs - 512
General Purpose Registers	50,000 (words) Retentive 16,384 (bits) Retentive 16,384 (bits) Non-retentive


Connectivity	
Serial Ports	1 RS-232 & 1 RS-485 on first modular jack (MJ1/2) 1 RS-232 or 1 RS-485 on second modular jack (MJ3)
USB mini-B	USB 2.0 (480MHz) Programming & Data Access
USB A	USB 2.0 (480MHz) for USB FLASH Drives (up to 2TB)
CAN	Remote I/O, Peer-to-Peer Comms, i3 Configurator
Ethernet	10/100MB (Auto-MDX), Modbus TCP, HTTP, FTP, SMTP, i3 Configurator, Ethernet IP
Remote I/O	IOS, Smart I/O, iSmart
Removable Memory	MicroSD™ (support for 32GB max) Application updates, Datalogging, more

Input / Output Specifications									
Model	DC In	DC Out	Relays	HS In	HS Out	mA/V In	mA/V RTD/TC	mA/V Out	High Speed Counters
10D03	12		6	4		4			Number of Counters
10B04	12	12		4	2	2			2
20B05	24	16		4	2	2			Maximum Frequency
13C14	12	12		4	2		2	2	500kHz each
10E24	12	12		4	2		6*	4*	Accumulator Size
									32-bits each
									Modes Supported
									Totalizer
									Quadrature
									Pulse Measurement
									Frequency Measurement
									2 Position Controlled Outputs
									1 ON/OFF Setpoint per Output

There are 4 high-speed inputs of the total DC inputs. There are 2 high-speed outputs of the total DC outputs. Model 10D03, 10B04, 20B05 feature 12-bit Analogue I/O. Model 13C14 features 14/16-bit Analogue I/O. High-speed outputs can be used for PWM and Pulse Train Outputs, currently limited to <65kHz. Model 10E14 features a 14/17 bit Analogue I/O.


*Up to six mA/V In, RTD/TC, and mA/V Out

Dimensions & Panel Cutout

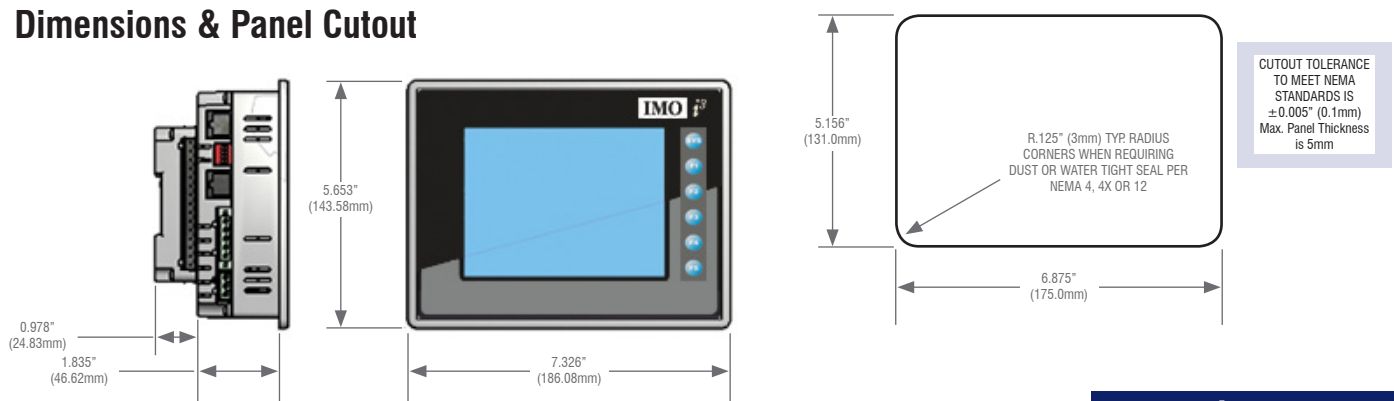

i³CX Intelligent Control Station

Ports & Connectors



DC Input / Frame


Torque rating: 4.5-7 Lb-in
(0.50-0.78Nm)

DC- is internally connected to I/O V-,
but is isolated from CAN V-

A Class 2 power supply must be used

Primary Power Port Pins

Pin	Signal	Signal Description
1	Ground	Frame Ground
2	DC-	Input Power Supply Ground
3	DC+	Input Power Supply Voltage




MJ1/2 Independent Serial Ports

MJ1: RS-232 with Full Handshaking


MJ2: RS-485 Half-Duplex

PIN	MJ1 PINS		MJ2 PINS	
	Signal	Direction	Signal	Direction
8	TXD	OUT	-	-
7	RXD	IN	-	-
6	0 V	Ground	0 V	Ground
5	+5V@60mA	OUT	+5V@60mA	OUT
4	RTS	OUT	-	-
3	CTS	IN	-	-
2	-	-	RX- / TX-	IN / OUT
1	-	-	RX+ / TX+	IN / OUT

ON



DIP Switches



Switch	Name	Function	Default
1	MJ3 RS-485 Termination	ON = Terminated	OFF
2	MJ3 Duplex	ON = Half	OFF
3		OFF = Full	
4	MJ2 RS-485 Termination	ON = Terminated	OFF

Fixed Address	Digital/Analog I/O Function	i3CX Model				
		10D03	10B04	20B05	13C14	10E24
%I1	Digital Inputs	1-12	1-12	1-24	1-12	1-12
	Reserved	13-32	13-31	25-31	13-31	13-31
	ESCP Alarm	n/a	32	32	32	32
%Q1	Digital Outputs	1-6	1-12	1-16	1-12	1-12
	Reserved	7-24	13-24	17-24	13-24	13-24
%AI1	Analogue Inputs	1-4	1-2	1-2	1-2	1-4:33-38
	Reserved	5-12	3-12	3-12	3-12	n/a
%AQ1	Reserved	n/a	1-8	1-8	1-8	1-12
	Analogue Outputs	n/a	n/a	n/a	9-10	n/a

Reserved areas maintain backward compatibility with other i3 Controller models

CAN




Locking Spring-Clamp
2-Terminators Per Conductor
Mounting screw torque rating: 4.5 Lb-in
(0.50Nm)

SHLD and V+ pins are not
internally connected to i³CX

Primary Power Port Pins

Pin	Signal	Description	Direction
1	V-	CAN Ground - Black	-
2	CN L	CAN Data Low - Blue	IN / OUT
3	SHLD	Shield Ground - None	-
4	CN H	CAN Data High - White	IN / OUT
5	V+ (NC)	No Connect - Red	-



MJ3 Serial Port

Two multiplexed serial ports on one
modular jack (8posn)

PIN	MJ3 PINS	
	Signal	Direction
8	TXD RS-232	OUT
7	RXD RS-232	IN
6	0 V	Ground
5	+5V@60mA	OUT
4	TX- RS-485	OUT
3	TX+ RS-485	OUT
2	RX- RS-485	IN
1	RX+ RS-485	IN

Built-in I/O

I/O is mapped into i3 Register space, in three separate areas – Digital/Analogue I/O, High-Speed Counter I/O, and High-Speed Output I/O. Digital/Analogue I/O location is fixed starting at 1, but the High-Speed Counter and High-Speed Output references may be mapped to any open register location. For more details on using the High-Speed Counter and High-Speed Outputs, see the i3CX User's Manual.

Default Address*	High Speed Counter Function	i3CX Models
%I1601	Status Bits	1-8
&Q1601	Command Bits	1-32
%AI0401	Accumulator 1&2	1-8
%AQ0401	Preload & Match Values	1-12

*Starting Address locations for
%, %Q, %AI & %AQ may
be re-mapped by user

Default Address*	High Speed Output Function	i3CX Models
%I1617	Status Bits	1-8
&Q**	Command Bits	1-32
n/a	n/a	n/a
%AQ0421	PWM or Pulse Train Parameters	1-20

*Starting Address locations for
%I & %AQ may be re-mapped by user

**Q1-Q2 are part of the Fixed I/O Map. In High
Speed Output mode they can be used to initiate a
Stepper/PTO Move

i³CX Intelligent Control Station

Safety

WARNING: Battery may explode if mistreated. Do not recharge, disassemble or dispose of in fire.

WARNING: EXPLOSION HAZARD - BATTERIES MUST ONLY BE CHANGED IN AN AREA KNOWN TO BE NON-HAZARDOUS

This equipment is suitable for use in Class 1, Division 2, Groups A, B, C and D or Non-hazardous locations only.

FOR U.S. & CANADA ONLY

Power input and output (I/O) wiring must be in accordance with Class 1, Division 2 wiring methods of the National Electric Code, NFPA70 for installations in the U.S. or as specified in Section 18-1J2 of the Canadian Electric Code for installations within Canada and in accordance with the authority having jurisdiction.

WARNING: EXPLOSION HAZARD - Do not disconnect equipment unless power has been switched off or the area is known to be non-hazardous.

WARNING: EXPLOSION HAZARD - Substitution of components may impair suitability for Class 1, Division 2.

Digital outputs shall be supplied from the same source as the i3 Controller.

WARNING: Only qualified electrical personnel familiar with the construction and operation of this equipment and the hazards involved should install, adjust, operate, or service this equipment. Read and understand this manual and other applicable manuals in their entirety before proceeding. Failure to observe this precaution could result in severe bodily injury or loss of life.

WARNING: To avoid the risk of electric shock or burns, always connects the earth ground before making any other connections.

WARNING: To reduce the risk of fire, electrical shock, or physical injury it is strongly recommended to fuse all Power Sources connected to the i3 controller. Be sure to locate fuses as close to the source as possible.

WARNING: Replace fuse with the same type and rating to provide protection against risk of fire and shock hazards.

WARNING: In the event of repeated failure, do not replace the fuse again as a repeated failure indicates a defective condition that will not clear by replacing the fuse.

Jumpers on connector JP1 and others shall not be removed or replaced while the circuit is live unless the area is known to be free of ignitable concentrations of flammable gases or vapours.

Common Cause of Analogue Input Transorb Failure

If a 4-20mA circuit is initially wired with loop power, but without a load, the analogue Input could see 24VDC. This is higher than the rating of the transorb. This can be solved by NOT connecting loop power prior to load connection, or by installing a low-cost PTC in series between the load and analogue input.

