

*i*³AX Intelligent Control Station

- 128 x 64 Monochrome LCD Display
- MicroSD™ Data storage
- Real Time Clock
- 1 CAN Port, 2 RS-232 / RS-485
- **1 Integral Ethernet Port**
- Addressable function keys
- 256kB RAM (Program), 16MB (Graphical)
- IP65 (NEMA4X)
- 10 - 30 VDC Power Supply
- Free Configuration Software
- Remote I/O Communication
- Optional - Modem (SMS, GSM, GPRS)
- **Supports *i*³RMI Webserver Functionality**



Options & Ordering Codes

Standard Options	DI	DO	AI	AO
i3AX12X/10D03-SEHF	12	6 Relay	4	-
i3AX12X/13C14-SEHF	12	12	2*	2
i3AX12X/20B05-SEHF	24	16	2	-
i3AX12X/10B04-SEHF	12	12	2	-
i3AX12X/10E24-SEHF	12	12	6*	4

* Universal Analogue Inputs

i3	AX	12	X	/	10	D	0	3	-	S	E	H	F
Mono Display													
128 x 64		AX											
Comms Ports													
RS-232/485, RS-232/485		12											
Programmable Keys													
14 Programmable Keys			X										
Digital Inputs													
No Digital Input					00								
12 Digital Inputs					10								
24 Digital Inputs					20								
12 Digital Inputs + Temperature PT100/TC					13								
Digital Outputs													
0		No Digital Output											
1		6 (Relay)											
3		6 (Relay)											
4		12 (DC)											
5		16 (DC)											
Analogue Outputs													
0		No Analogue Output											
1		2 (12 Bit)											
2		4 (12 Bit)											
Analogue Inputs													
0		No Analogue Input											
B		2 (12 Bit)											
C		2 (14 Bit)											
D		4 (12 Bit)											
E		6 (14/17 Bit)											
Serial													
Ethernet		E											
CAN		C											
MicroSD™ Flash Card													
DeviceNet												D	
iCAN												H	
CANopen												A	
J1939												J	

i³AX Intelligent Control Station

Technical Specifications

General Specifications	
Required Power (Steady State)	84mA @ 24VDC
Required Power (Inrush)	30A for 1ms @ 24VDC
Primary Voltage Range	10-30VDC
Relative Humidity	5 to 95% Non-Condensing
Clock Accuracy	+/-90 seconds per month at 20°C
Operating Temperature	-10°C to +60°C
Storage Temperature	-20°C to +70°C
Weight	0.340kg
Approvals	cUL, UL, CE, FCC


Control & Logic Specifications	
Control Language Support	Advanced Ladder Logic Full IEC 61131-3
Logic Program Size & Logic Scan Rate	256kB Maximum 0.7ms/k
I/O Support	Digital Inputs - 2048
	Digital Outputs - 2048
	Analogue Inputs - 512
	Analogue Outputs - 512
General Purpose Registers	9,999 (words) Retentive 2,048 (bits) Retentive 2,048 (bits) Non-retentive

Display Specifications	
Display Type	Trans-reflective LCD (outdoor readable)
Resolution	128 x 64
Colour	Monochrome
Screen Memory	16MB
User-Programmable Screens	1023 (max. 50 objects per screen)
Backlight	LED - 30,000 hour life
Screen Update Rate	User configurable within the scan time (perceived as instantaneous in many cases)


Connectivity	
Serial Ports	1 RS-232 or 1 RS-485 on first modular jack (MJ1) 1 RS-232 or 1 RS-485 on second modular jack (MJ2)
USB mini-B	USB 2.0 (480MHz) Programming & Data Access
CAN	Remote I/O, Peer-to-Peer Comms, i3 Configurator
Ethernet	10/100MB (Auto-MDX), Modbus TCP, HTTP, FTP, SMTP, i3 Configurator, Ethernet IP, ASCII TCP
Remote I/O	IOS, Smart I/O, iSmart
Removable Memory	MicroSD™ (support for 32GB max) Application updates, Datalogging, more

Input / Output Specifications										
Model	DC In	DC Out	Relays	HS In	HS Out	mA/V In	mA/V RTD/ TC	mA/V Out	High Speed Counters	
10D03	12		6	4		4			Number of Counters	4
10B04	12	12		4	2	2			Maximum Frequency	500kHz each
20B05	24	16		4	2	2			Accumulator Size	32-bits each
13C14	12	12		4	2		2	2	Modes Supported	
10E24	12	12		4	2		6*	4*	Totalizer	Quadrature
There are 4 high-speed inputs of the total DC inputs. There are 2 high-speed outputs of the total DC outputs. Model 10D03, 10B04, 20B05 feature 12-bit Analogue I/O. Model 13C14 features 14/16-bit Analogue I/O. High-speed outputs can be used for PWM and Pulse Train Outputs, currently limited to <10kHz and <65kHz for the 10E24 model. Model 10E14 features a 14/17 bit Analogue I/O.									Pulse Measurement	Frequency Measurement
									2 Position Controlled Outputs 1 ON/OFF Setpoint per Output	

Dimensions & Panel Cutout

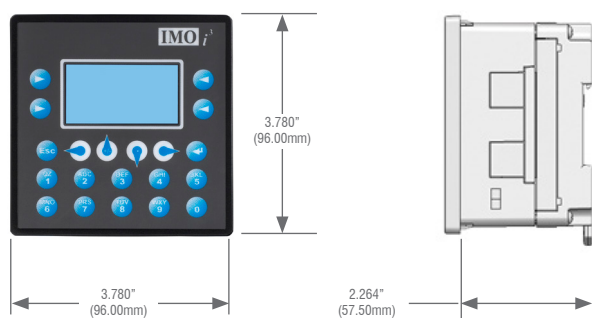


NOTE: Depth including modem = 2.559" (65.0mm)



CUTOUT TOLERANCE
TO MEET NEMA
STANDARDS IS
±0.005" (0.1mm)
Max. Panel Thickness
is 5mm

i³AX Intelligent Control Station


Ports & Connectors



DC Input / Frame

Torque rating: 4.5-7 Lb-in
(0.50-0.78Nm)

DC- is internally connected to I/O V-,
but is isolated from CAN V-
A Class 2 power supply must be used




CAN

Mounting screw torque rating: 4.5 Lb-in
(0.50Nm)

SHLD and V+ pins are not
internally connected to i³A

Primary Power Port Pins

Pin	Signal	Signal Description
1	Ground	Frame Ground
2	DC-	Input Power Supply Ground
3	DC+	Input Power Supply Voltage




MJ1 Independent Serial Ports

Two multiplexed serial ports on one
modular jack (8posn)

Primary Power Port Pins

Pin	Signal	Description	Direction
1	V-	CAN Ground - Black	-
2	CN L	CAN Data Low - Blue	IN / OUT
3	SHLD	Shield Ground - None	-
4	CN H	CAN Data High - White	IN / OUT
5	V+ (NC)	No Connect - Red	-



MJ2 Serial Port

Two multiplexed serial ports on one
modular jack (8posn)

PIN MJ1 PINS


PIN	Signal	Direction
8	TXD RS-232	OUT
7	RXD RS-232	IN
6	0 V	Ground
5	+5V@60mA	OUT
4	RTS RS-232	OUT
3	CTS RS-232	IN
2	RX- / TX- RS-485	IN / OUT
1	RX+ / TX+ RS-485	IN / OUT

PIN MJ2 PINS

PIN	Signal	Direction
8	TXD RS-232	OUT
7	RXD RS-232	IN
6	0 V	Ground
5	+5V@60mA	OUT
4	TX- RS-485	OUT
3	TX+ RS-485	OUT
2	RX- (RX- / TX-*) RS-485	IN or IN/OUT
1	RX+ (RX+ / TX+*) RS-485	IN or IN/OUT

* In half duplex mode

DIP Switches



Switch	Name	Function	Default
1	RS-485 Termination (MJ1)	ON = Terminated	OFF
2	RS-485 Termination (MJ2)	ON = Terminated	OFF
3	Factory Use	Always Off	OFF

Built-in I/O

I/O is mapped into i³ Register space, in three separate areas – Digital/Analogue I/O, High-Speed Counter I/O, and High-Speed Output I/O. Digital/Analogue I/O location is fixed starting at 1, but the High-Speed Counter and High-Speed Output references may be mapped to any open register location. For more details on using the High-Speed Counter and High-Speed Outputs, see the i³AX User's Manual.

Fixed Address	Digital/Analog I/O Function	i ³ AX Model					
		10A01	10D03	10B04	20B05	13C14	10E24
%I1	Digital Inputs	1-12	1-12	1-12	1-24	1-12	1-12
	Reserved	13-32	13-32	13-31	25-31	13-31	13-31
	ESCP Alarm	n/a	n/a	32	32	32	32
%Q1	Digital Outputs	1-6	1-6	1-12	1-16	1-12	1-12
	Reserved	7-24	7-24	13-24	17-24	13-24	13-24
%AI1	Analogue Inputs	1	1-4	1-2	1-2	1-2	1-4:33-38
	Reserved	2-12	5-12	3-12	3-12	3-12	n/a
%AQ1	Reserved	n/a	n/a	1-8	1-8	1-8	1-8
	Analogue Outputs	n/a	n/a	n/a	n/a	9-10	9-12

Reserved areas maintain backward compatibility with other i³ Controller models

Default Address*	High Speed Counter Function	i ³ AX Models
%I1601	Status Bits	1-8
%Q1601	Command Bits	1-32
%AI0401	Accumulator 1&2	1-8
%AQ0401	Preload & Match Values	1-12

*Starting Address locations for %I, %Q, %AI & %AQ may be re-mapped by user

Default Address*	High Speed Output Function	i ³ AX Models
%I1617	Status Bits	1-8
%Q**	Command Bits	1-32
n/a	n/a	n/a
%AQ0421	PWM or Pulse Train Parameters	1-20

*Starting Address locations for %I & %AQ may be re-mapped by user


**Q1-Q2 are part of the Fixed I/O Map. In High Speed Output mode they can be used to initiate a Stepper/PTO Move

i³AX Intelligent Control Station



10D03 I/O Board Specifications

Digital DC Inputs		Digital Relay Outputs	
Inputs per Module	12 including 4 configurable HSC inputs	Outputs per Module	6 Relay
Commons per Module	1	Commons per Module	6
Input Voltage Range	10-30 VDC	Max. Switching Current per Relay	3A @ 250 VAC, Resistive
Absolute Max. Voltage	35 VDC Max	Max. Total Output Current	5A Continuous
Input Impedance	10 kΩ	Max. Switching Voltage	275 VAC, 30 VDC
Input Current	Positive Logic 0.8mA Negative Logic 0.3mA	Max. Switched Power	1250 VAC, 150W
Upper Threshold	8 VDC	Contact Isolation to Ground	1000 VAC
Lower Threshold	3 VDC	Max. Voltage Drop at Rated Current	0.5V
OFF to ON Response	1 ms	Expected Life (see below for detail)	No Load: 5,000,000 200,000 at rated load
ON to OFF Response	1 ms	Max. Switching Rate	300 CPM at no load 20 CPM at rated load
HSC Max. Switching Rate	500kHz	Type	Mechanical Contact
		Response Time	One update per ladder scan plus 10ms
Analogue Inputs, Medium Resolution			
Number of Channels	4	Input Ranges	0-10 VDC, 0-20 mA, 4-20 mA
Safe Input Voltage Range	-0.5V to 12V	Input Impedance (clamped @ -0.5VDC to 12VDC)	Current Mode: 100 Ω Voltage Mode: 500 kΩ
Nominal Resolution	12 Bits	%AI Full Scale	32,000
Max. Over Current	35 mA	Conversion Speed	Once per Ladder Scan
Max. Error at 25°C (excluding zero) Adjusting filtering may tighten	4-20 mA 1.00% of FS 0-20 mA 1.00% of FS 0-10 VDC 1.50% of FS	Filtering	160 Hz hash (noise) filter 1-128 scan digital running average filter

J1 (Orange)	Name
I1	IN1
I2	IN2
I3	IN3
I4	IN4
I5	IN5
I6	IN6
I7	IN7
I8	IN8
H1	HSC1 / IN9
0V	Common
A1	Analogue IN1
A2	Analogue IN2
A3	Analogue IN3
A4	Analogue IN4
0V	Common

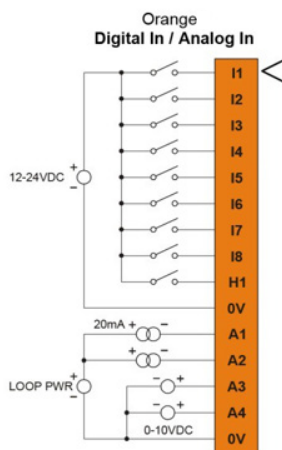

J2 (Black)	Name
C6	Relay 6 COM
R6	Relay 6 NO
C5	Relay 5 COM
R5	Relay 5 NO
C4	Relay 4 COM
R4	Relay 4 NO
C3	Relay 3 COM
R3	Relay 3 NO
C2	Relay 2 COM
R2	Relay 2 NO
C1	Relay 1 COM
R1	Relay 1 NO
H4	HSC4 / IN12
H3	HSC3 / IN11
H2	HSC2 / IN10

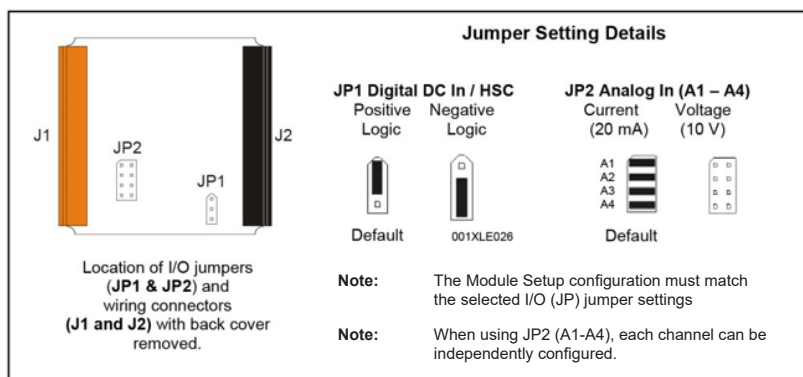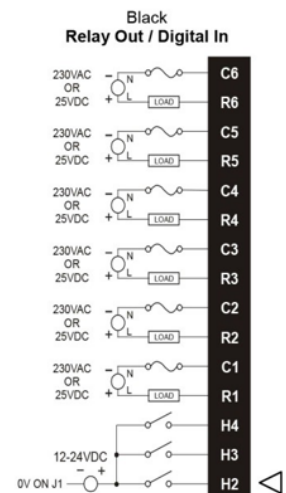

WARNING: EXPOSURE TO SOME CHEMICALS MAY DEGRADE THE SEALING PROPERTIES OF MATERIALS USED IN THE Tyco relay PCJ

Cover / case & base: Mitsubishi engineering Plastics Corp.
5010GN6-30 or 5010GN6-30 M8 (PBT)
Sealing Material: Kishimoto 4616-50K (I part epoxy resin)


It is recommended to periodically inspect the relay for any degradation of properties and replace if degradation is found

i³AX Intelligent Control Station


10B04 & 20B05 I/O Board Specifications

Digital DC Inputs	10B04	20B05	Digital DC Outputs	10B04	20B05
Inputs per Module	12 including 4 configurable HSC inputs	24 including 4 configurable HSC inputs	Outputs per Module	12 including 2 configurable PWM outputs	16 including 2 configurable PWM outputs
Commons per Module	1		Commons per Module	1	
Input Voltage Range	10-30 VDC		Output Type	Sourcing / 10 K Pull-Down	
Absolute Max. Voltage	35 VDC Max		Absolute Max. Voltage	28 VDC Max	
Input Impedance	10 k Ω		Output Protection	Short Circuit	
Input Current	Positive Logic	Negative Logic	Max. Output Current per Point	0.5 A	
Upper Threshold	0.8mA	-1.6mA	Max. Total Current	4 A Continuous	
Lower Threshold	0.3mA	-2.1mA	Max. Output Supply Voltage	30 VDC	
Max. Upper Threshold	8 VDC		Min. Output Supply Voltage	10 VDC	
Max. Lower Threshold	3 VDC		Max. Voltage Drop at Rated Current	0.25V	
OFF to ON Response	1 ms		Max. Inrush Current	650 mA per channel	
ON to OFF Response	1 ms		Min. Load	None	
HSC Max. Switching Rate	500 kHz each		OFF to ON Response	1 ms	
ON to OFF Response	1 ms		Output Characteristics	Current Sourcing (Pos Logic)	
Analogue Inputs, Medium Resolution					
Number of Channels	4		Input Ranges	0-10 VDC, 0-20 mA, 4-20 mA	
Safe Input Voltage Range	-0.5V to 12V		Input Impedance (clamped @ -0.5VDC to 12VDC)	Current Mode: 100 Ω Voltage Mode: 500 k Ω	
Nominal Resolution	12 Bits		%AI Full Scale	32,000	
Max. Over Current	35 mA		Conversion Speed	Once per Ladder Scan	
Max. Error at 25°C (excluding zero) Adjusting filtering may tighten	4-20 mA 1.00% of FS 0-20 mA 1.00% of FS 0-10 VDC 1.50% of FS		Filtering	160 Hz hash (noise) filter 1-128 scan digital running average filter	

J1 (Orange)	Signal Name
I1	IN1
I2	IN2
I3	IN3
I4	IN4
I5	IN5
I6	IN6
I7	IN7
I8	IN8
H1	HSC1 / IN9
H2	HSC2 / IN10
H3	HSC3 / IN11
H4	HSC4 / IN12
A1	Analogue IN1
A2	Analogue IN2
0V	Common

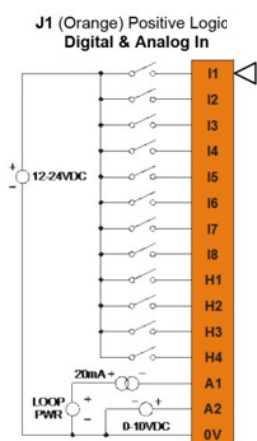


J3 (Orange)	20B05 Signal Name
I13	IN13
I14	IN14
I15	IN15
I16	IN16
I17	IN17
I18	IN18
I19	IN19
I20	IN20
I21	IN21
I22	IN22
I23	IN23
I24	IN24
0V	Common

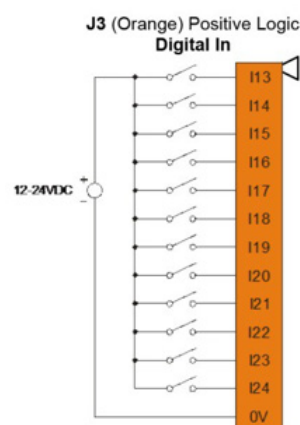



*i*³AX Intelligent Control Station

10B04 & 20B05 I/O Board Specifications

J2 (Black)	10B04	20B05
0V	Common	
V+	V+	
NC (Q13)	No Connect	OUT13
Q12	OUT12	
Q11	OUT11	
Q10	OUT10	
Q9	OUT9	
Q8	OUT8	
Q7	OUT7	
Q6	OUT6	
Q5	OUT5	
Q4	OUT4	
Q3	OUT3	
Q2	OUT2 / PWM2	
Q1	OUT1 / PWM1	

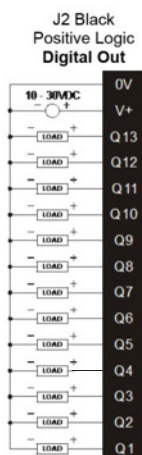

J4 (Orange)	20B05
Q16	OUT16
Q15	OUT15
Q14	OUT14

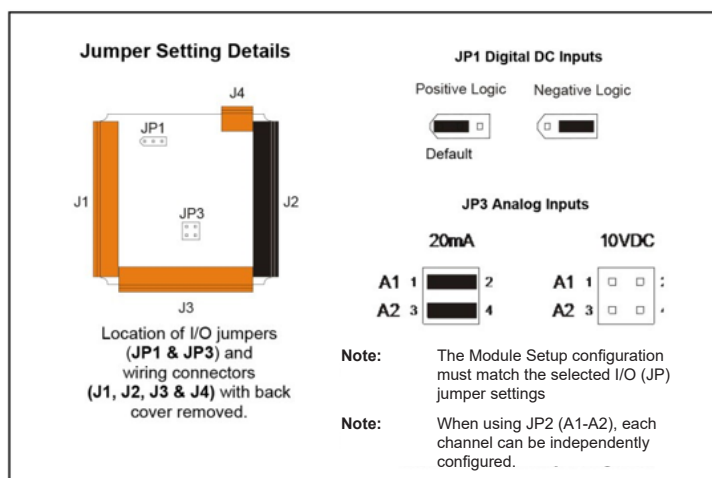

Note:
10B04 uses J1 and J2 only
20B05 uses J1, J2, J3 and J4


*i*³AX Intelligent Control Station

13C14 I/O Board Specifications

Digital DC Inputs			Digital DC Outputs	
Inputs per Module	12 including 4 configurable HSC inputs		Outputs per Module	12 including 2 configurable PWM outputs
Commons per Module	1		Commons per Module	6
Input Voltage Range	10-30 VDC		Output Type	Sourcing / 10 K Pull-Down
Absolute Max. Voltage	35 VDC Max		Absolute Max. Voltage	28 VDC Max
Input Impedance	10 kΩ		Output Protection	Short Circuit
Input Current	Positive Logic	Negative Logic	Max. Output Current per Point	0.5A
Upper Threshold	0.8mA	-1.6mA	Max. Total Current	4 A Continuous
Lower Threshold	0.3mA	-2.1mA	Max. Output Supply Voltage	30 VDC
Max. Upper Threshold	8 VDC		Min. Output Supply Voltage	10 VDC
Max. Lower Threshold	3 VDC		Max. Voltage Drop at Rated Current	0.25V
OFF to ON Response	1 ms		Max. Inrush Current	650 mA per channel
ON to OFF Response	1 ms		Min. Load	None
HSC Max. Switching Rate	500kHz		OFF to ON Response	1 ms
			ON to OFF Response	1 ms
			Output Characteristics	Current Sourcing (Positive Logic)
Analogue Inputs, High Resolution				
Number of Channels	2		Thermocouple	Temperature Range
Input Ranges (Selectable)	0 - 10 VDC, 0 – 20 mA, 4 – 20 mA, 100mV PT100 RTD, and J, K, N, T, E, R, S, B Thermocouple		B / R / S E T J K / N	2912°F to 32.0°F (1600°C to 0°C) 1652°F to -328°F (900°C to -200°C) 752.0°F to -400°F (400°C to -240°C) 1382.0°F to -346.0°F (750°C to -210°C) 2498.0°F to -400°F (1370°C to -240°C)
Nominal Resolution	10V, 20mA, 100mV: 14 Bits RTD, Thermocouple: 16 Bits		Thermocouple Common Mode Range	±10V
Converter Type	Delta Sigma		Max. Thermocouple Error	±0.2% (±0.3% below -100°C)
Input Impedance (Clamped @ -0.5 VDC to 12 VDC)	Current Mode: 100 Ω, 35mA Max. Continuous Voltage Mode: 500 kΩ, 35mA Max. Continuous		Max. Error at 25°C (*excluding zero)	4-20 mA ±0.10% *0-20 mA ±0.10% *0-10 VDC ±0.10% RTD (PT100) ±1.0°C 0-100 mV ±0.05%
AI Full Scale	10 V, 20 mA, 100 mV: 32,000 counts full scale. RTD / T/C: 20 counts / °C		Conversion Speed, Both Channels Converted	10V, 20mA, 100mV: 30 Times/Second RTD, Thermocouple: 7.5 Times/Second
Max. Over-Current	35mA		Conversion Time per Channel	10V, 20mA, 100mV: 16.7mS RTD, Thermocouple: 66.7mS
Open Thermocouple Detect Current	50mA		RTD Excitation Current	250 μA
Analogue Outputs				
Number of Channels	4		Minimum Current Load	500Ω
Output Ranges	0-10VDC, 0-20mA, 4-20mA		Galvanic Isolation	None
Nomimnal Resolution	12 Bits		Conversion Speed	Min. all channels once per scan
Response Time	One update per ladder scan			
Max. Error at 25°C (excluding zero)	0-20mA 0-10V	0.1% of FS 0.1% of FS	Additional Error for temperatures other than 25°C	20mA 0.0126%/°C


i³AX Intelligent Control Station

J1 (Orange)	Name
I1	IN1
I2	IN2
I3	IN3
I4	IN4
I5	IN5
I6	IN6
I7	IN7
I8	IN8
H1	HSC1 / IN9
H2	HSC2 / IN10
H3	HSC3 / IN11
H4	HSC4 / IN12
NC	No Connect
NC	No Connect
0V	Common



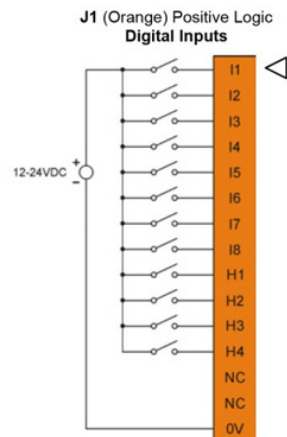


J2 (Black)	Name
0V	Common
V+	Output Power
NC	No Connect
Q12	OUT12
Q11	OUT11
Q10	OUT10
Q9	OUT9
Q8	OUT8
Q7	OUT7
Q6	OUT6
Q5	OUT5
Q4	OUT4
Q3	OUT3
Q2	OUT2 / PWM2
Q1	OUT1 / PWM1

J2 (Black) Positive Logic Digital Outputs



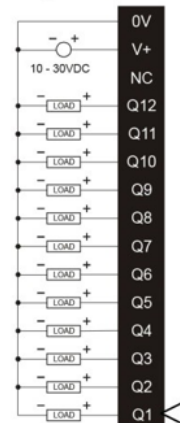


J3 (Orange)	Name
T1+	TC (1+) or RTD (1+) or 100mV (1+)
T1-	TC (1-) or RTD (1-) or 100mV (1-)
T2+	TC (2+) or RTD (2+) or 100mV (2+)
T2-	TC (2-) or RTD (2-) or 100mV (2-)
AQ1	10V or 20mA Out (1)
AQ2	10V or 20mA Out (2)
0V	Common
MA1	0-20mA In (1)
V1	0-10V In (1)
0V	Common
MA2	0-20mA In (2)
V2	0-10V In (2)
0V	Common

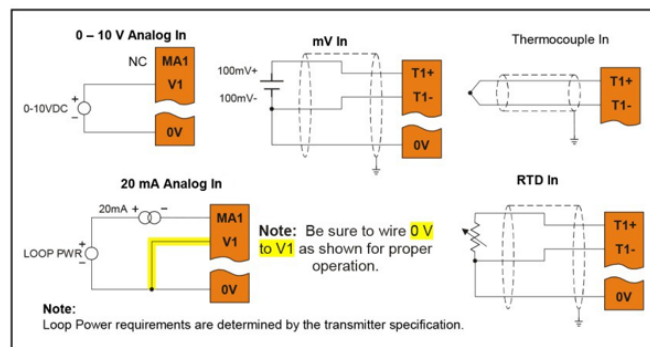

Location of I/O jumpers (JP1-JP4) and wiring connectors (J1-J4) with back cover removed.

Jumper Setting Details

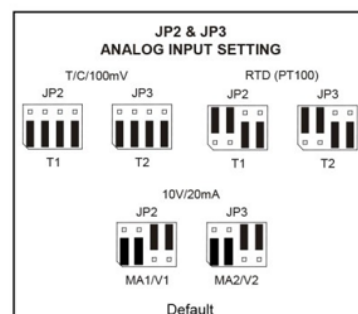


i³AX Intelligent Control Station

10E24 I/O Board Specifications

Digital DC Inputs			Digital DC Outputs	
Inputs per Module	12		Outputs per Module	12
Commons per Module	1		Commons per Module	1
Input Voltage Range	10-30 VDC		Output Type	Sourcing / 10 K Pull-Down
Absolute Max. Voltage	35 VDC Max		Absolute Max. Voltage	30 VDC Max
Input Impedance	10 kΩ		Output Protection	Short Circuit & Overvoltage
Input Current	Positive Logic	Negative Logic	Max. Output Current per Point	0.5A
Upper Threshold	0.8mA	-1.6mA	Max. Total Current per driver	2 A Continuous
Lower Threshold	0.3mA	-2.1mA	Max. Output Supply Voltage	30 VDC
Min. “On” Input	8 VDC		Min. Output Supply Voltage	10 VDC
Max. “Off” Input	3 VDC		Max. Voltage Drop at Related Current	0.25 VDC
Galvanic Isolation	None		I/O Indication	None
OFF to ON Response	1 ms		Galvanic Isolation	None
ON to OFF Response	1 ms		Min. Load	None
Logic Polarity	Positive and Negative based on Common pin level.		OFF to ON Response	150 ns
I/O Indication	None		ON to OFF Response	150 ns
High Speed Counter Inputs	4 - DIN 8-12		PWM Out	500kHz
High Speed Counter Max. Frequency	500kHz		Output Characteristics	Current Sourcing (Positive Logic)
Connector Type	3.5mm Pluggable cage clamp connector			
Analogue Inputs, High Resolution				
Number of Channels	6		Absolute Max. Input Voltage	-0.5 to 12V DC
Input Range	0–20mA, 4-20 mA dc. 0-60mV, 0-10V dc. TC - J, K, N, T, E, R, S, B RTD - PT100, PT1000		Input Impedance (Clamped @ -0.5 to 10.23VDC).	TC / RTD / mV > 2 MΩ mA: 15 Ω + 1.5 V V: 1.1 MΩ
Nominal Resolution	14 - 17 Bits (variable depending on input type)		Galvanic Isolation	None
Sensor Range and Accuracy	Input Type		Range	Accuracy
	TC J		-120°C to 1000°C / -184°F to 1832°F	± 0.2% FS ± 1°C
	TC K		-130°C to 1372°C / -202°F to 2501.6°F	± 0.2% FS ± 1°C
	TC T		-130°C to 400°C / -202°F to 752°F	± 0.2% FS ± 1°C
	TC E		-130°C to 780°C / -202°F to 1436°F	± 0.2% FS ± 1°C
	TC N		-130°C to 1300°C / -202°F to 2372°F	± 0.2% FS ± 1°C
	TC R, S		20°C to 1768°C / 68°F to 3214.4°F	± 0.2% FS ± 3°C
	TC B		100°C to 1820°C / 212°F to 3308°F	± 0.2% FS ± 3°C
	PT100/1000		-200°C to 850°C / -328°F to 1562°F	± 0.15% FS
	0-20mA		0-20mA	± 0.15% FS
	0-60mV		0-60mV	± 0.15% FS
	0-10V		0-10V	± 0.15% FS
Conversion Speed	Minimum all channels converted in approx. 150mS			
Analogue Outputs				
Number of Channels	4		Minimum Current Load	500Ω
Output Ranges	0-10VDC, 0-20mA, 4-20mA		Galvanic Isolation	None
Nomimnal Resolution	12 Bits		Conversion Speed	Min. all channels once per scan
Response Time	One update per ladder scan			
Max. Error at 25°C (excluding zero)	0-20mA 0-10V	0.1% of FS 0.1% of FS	Additional Error for temperatures other than 25°C	20mA 0.0126%/°C


i³AX Intelligent Control Station

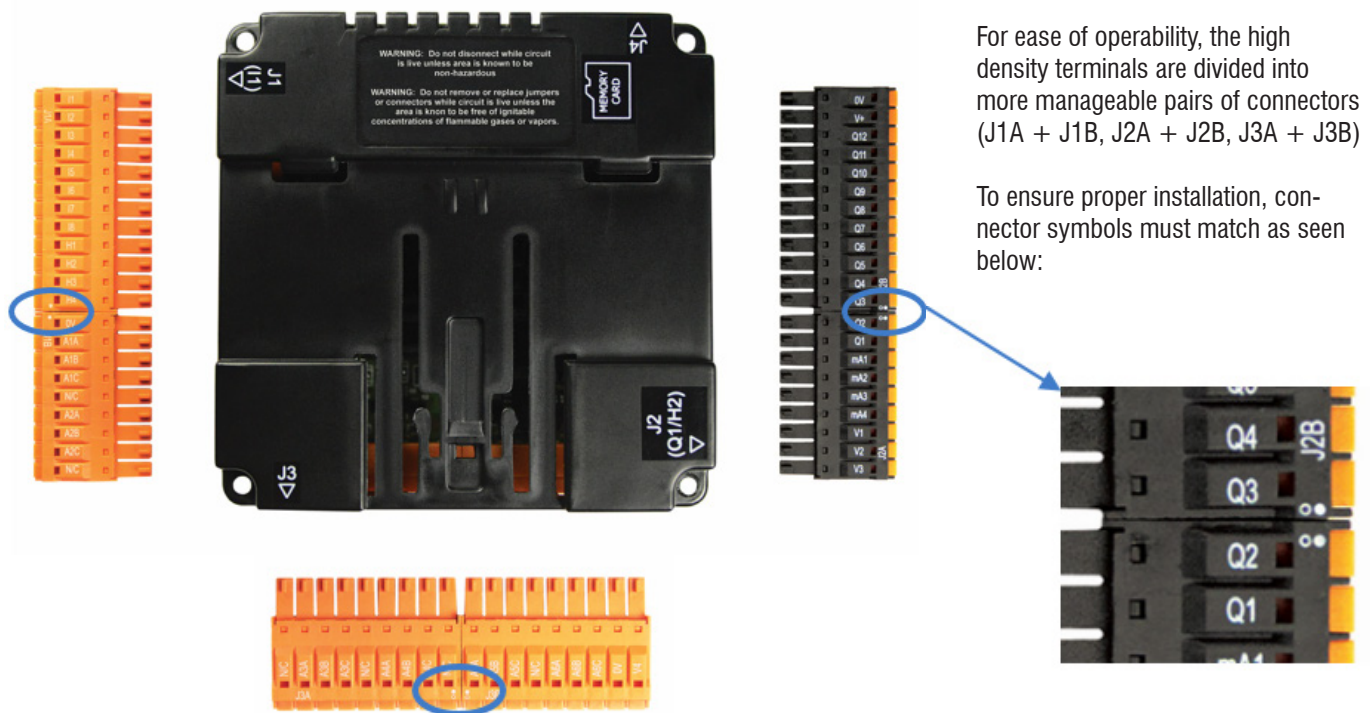

For ease of operability, the high density terminals are divided into more manageable pairs of connectors (J1A + J1B, J2A + J2B, J3A + J3B)

To ensure proper installation, connector symbols must match as seen below:



J1 (Orange/Green)	Signal Name
J1A	I1 V IN1
	I2 V IN2
	I3 V IN3
	I4 V IN4
	I5 V IN5
	I6 V IN6
	I7 V IN7
	I8 V IN8
J1B	H1 HSC1 / V IN9
	H2 HSC2 / V IN10
	H3 HSC3 / V IN11
	H4 HSC4 / V IN12
	0V Common
	A1A Univ. AI 1 pin 1
	A1B Univ. AI 1 pin 2
	A1C Univ. AI 1 pin 3
	NC No Connect
	A2A Univ. AI 2 pin 1
	A2B Univ. AI 2 pin 2
	A2C Univ. AI 2 pin 3
	NC No Connect

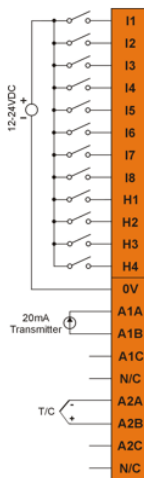

J3 (Orange/Green)	Signal Name
Univ. AI	NC No Connect
	A3A Univ. AI 3 pin 1
	A3B Univ. AI 3 pin 2
	A3C Univ. AI 3 pin 3
	NC No Connect
	A4A Univ. AI 4 pin 1
	A4B Univ. AI 4 pin 2
	A4C Univ. AI 4 pin 3
Univ. AI	NC No Connect
	A5A Univ. AI 5 pin 1
	A5B Univ. AI 5 pin 2
	A5C Univ. AI 5 pin 3
	NC No Connect
	A6A Univ. AI 6 pin 1
	A6B Univ. AI 6 pin 2
	A6C Univ. AI 6 pin 3
	NC No Connect
	V4 V OUT4*




J2 (Black/Green)	Signal Name
J2A	V3 V OUT 3*
	V2 V OUT 2*
	V1 V OUT 1*
	mA4 mA Out 4*
	mA3 mA Out 3*
	mA2 mA Out 2*
	mA1 mA Out 1*
	Q1 OUT 1 / PWM1
J2B	Q2 OUT 2 / PWM2
	Q3 OUT 3
	Q4 OUT 4
	Q5 OUT 5
	Q6 OUT 6
	Q7 OUT 7
	Q8 OUT 8
	Q9 OUT 9
	Q10 OUT 10
	Q11 OUT 11
	Q12 OUT 12
	V+ V External+
	0V Common

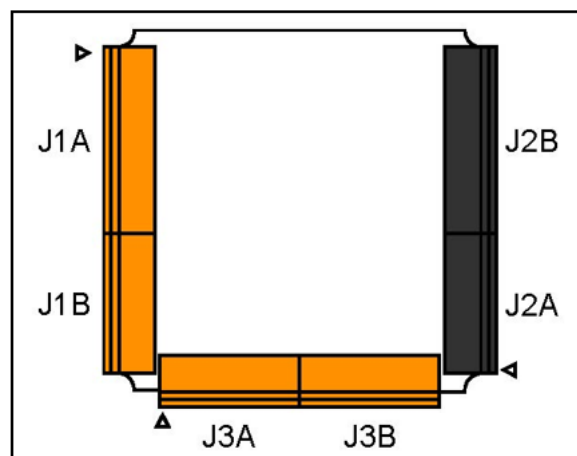

Note * Both mA & V outputs are active for each output channel, however, only the configured output type is calibrated (maximum 4 channels simultaneously).

*i*³AX Intelligent Control Station

Example of Universal Input Wiring Schematic

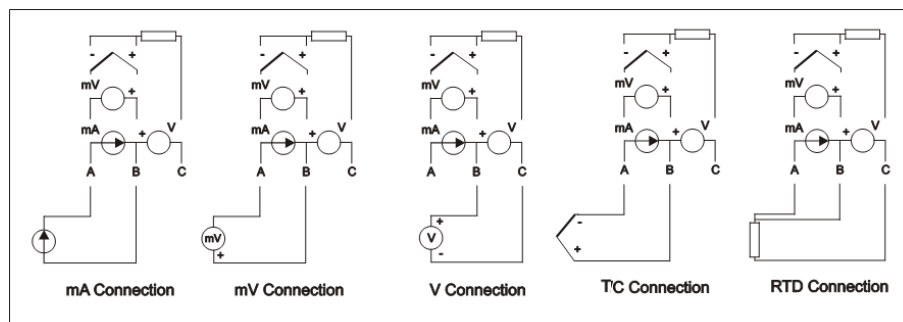

Configuration

The data registers as follows:-

Digital Inputs	Digital Outputs	Analogue Inputs	Analogue Outputs
%I1-12	%Q1-12	%AI1-4, %AI33-38	%AQ9-12

Note: The first four Analogue inputs are mapped to both %AI1-4 and %AI33-36, analogue input channels 5 & 6 are mapped to %AI37 and %AI38 respectively only.

Data Values

The analogue inputs return data types as follows:-

Input Mode	Data Format	Comment
0-20mA, 4-20mA	0-32000	
0-10V, 0-60mV	0-32000	
TC, RTD	Temperature in °C or °F to 1 decimal place xxx.y	°C or °F may be selected in the I/O config section. The value is an integer, the user should divide by 10.

Status Register

Register	Descriptions							
%R1	Bit-wise status register enable – R1.1 – R1.9 enable for registers R2 to R9							
%R2	Firmware version							
%R3	Watchdog count – cleared on power-up.							
%R4	Status bits -				16...4	3	2	1
					Reserved	Normal	Config	Calibration
%R5	Scan rate of the 10E24 board (average) in units of 100μS.							
%R6	Scan rate of the 10E24 board (max) in units of 100μS.							
%R7	Channel Status	Channel 2			Channel 1			
	8	7	6	5	4	3	2	1
	Open RTD	Out of Limits	Shorted RTD	Open TC	Open RTD	Out of Limits	Shorted RTD	Open TC
%R8	Channel Status	Channel 4			Channel 3			
	8	7	6	5	4	3	2	1
	Open RTD	Out of Limits	Shorted RTD	Open TC	Open RTD	Out of Limits	Shorted RTD	Open TC
%R9	Channel Status	Channel 6			Channel 5			
	8	7	6	5	4	3	2	1
	Open RTD	Out of Limits	Shorted RTD	Open TC	Open RTD	Out of Limits	Shorted RTD	Open TC
%R10-14	Reserved							

Note: For the purposes of the example, the block is shown starting at %R1, but it can be set to anywhere in the %R memory map.

i³AX Intelligent Control Station

Safety

WARNING: Battery may explode if mistreated. Do not recharge, disassemble or dispose of in fire.

WARNING: EXPLOSION HAZARD - BATTERIES MUST ONLY BE CHANGED IN AN AREA KNOWN TO BE NON-HAZARDOUS

This equipment is suitable for use in Class 1, Division 2, Groups A, B, C and D or Non-hazardous locations only.

FOR U.S. & CANADA ONLY

Power input and output (I/O) wiring must be in accordance with Class 1, Division 2 wiring methods of the National Electric Code, NFPA70 for installations in the U.S. or as specified in Section 18-1J2 of the Canadian Electric Code for installations within Canada and in accordance with the authority having jurisdiction.

WARNING: EXPLOSION HAZARD - Do not disconnect equipment unless power has been switched off or the area is known to be non-hazardous.

WARNING: EXPLOSION HAZARD - Substitution of components may impair suitability for Class 1, Division 2.

Digital outputs shall be supplied from the same source as the i3 Controller.

WARNING: Only qualified electrical personnel familiar with the construction and operation of this equipment and the hazards involved should install, adjust, operate, or service this equipment. Read and understand this manual and other applicable manuals in their entirety before proceeding. Failure to observe this precaution could result in severe bodily injury or loss of life.

WARNING: To avoid the risk of electric shock or burns, always connects the earth ground before making any other connections.

WARNING: To reduce the risk of fire, electrical shock, or physical injury it is strongly recommended to fuse all Power Sources connected to the i3 controller. Be sure to locate fuses as close to the source as possible.

WARNING: Replace fuse with the same type and rating to provide protection against risk of fire and shock hazards.

WARNING: In the event of repeated failure, do not replace the fuse again as a repeated failure indicates a defective condition that will not clear by replacing the fuse.

Jumpers on connector JP1 and others shall not be removed or replaced while the circuit is live unless the area is known to be free of ignitable concentrations of flammable gases or vapours.

Common Cause of Analogue Input Transorb Failure

If a 4-20mA circuit is initially wired with loop power, but without a load, the analogue Input could see 24VDC. This is higher than the rating of the transorb. This can be solved by NOT connecting loop power prior to load connection, or by installing a low-cost PTC in series between the load and analogue input.

