

Is this the smallest reversing contactor in the world?



Developed specifically for chain-hoist applications, the IMO “MA Series” of  and  approved micro-contactor is surely the neatest and most cost-effective solution for your motor switching requirements.

With >3mm contact clearance (in accordance with IEC 60335-1 Safety Standard) and with 5A AC3 @ 400VAC and 12A AC1 @ 400VAC ratings, the MA Series is suitable for most chain hoist motor switching applications including reversing contactor with mechanical interlock. There is even a PCB mount version that it fits right alongside your general electronic components.


Take a close look at how the MA can save space, reduce cost and improve performance in your products.



Micro Contactor MA Series



- Relay-sized contactor, making it the world's smallest
- >3mm contact clearance acc. to IEC 60335-1 for Safety Applications
- Reversing contactor with mechanical interlock
- 3 Pole and 1 Aux. Contact NO or NC
- 5A AC3 @ 400VAC (2.2kW) - 12A AC1 @ 400VAC
- AC coil voltages - TS15 DIN rail mounting
- PCB mounting
- DC coil pending

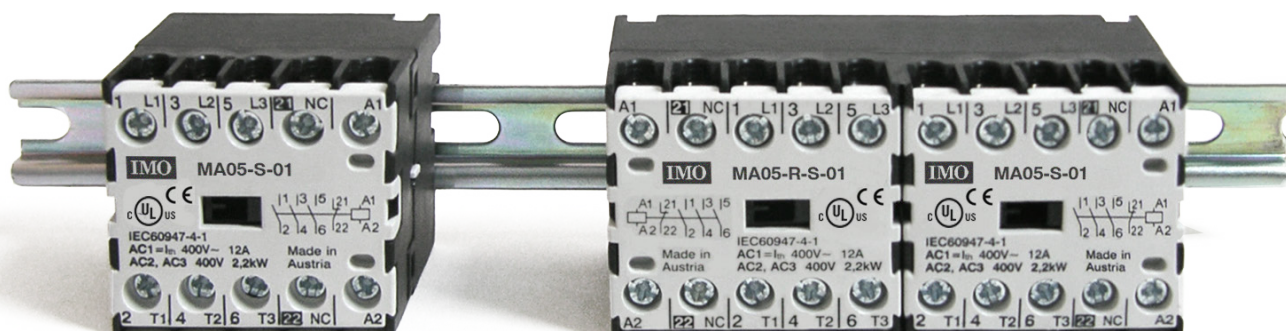

Micro Contactor Relays

Page 2



Micro Contactors

Page 3



Micro Contactors With Solder Pins
Coil Voltages

Page 4



Micro Reversing Contactor

Page 5



Technical Data
Dimensions

Page 6

Page 10

Micro Contactor MA Series



IMO

Micro Contactor Relays 4-Pole

AC Operated


Ratings Therm.	Contacts *2	Distinc. Number	Additional Contact	Type	Coil Voltage *1		Pack pcs.	Weight kg/pc.
AC15					24 24V 50/60Hz			
230V					230 220-240V 50/60Hz			
A	400V							
A	A							
	I_{th}							
	A							
	NO							
	NC							
		acc. to	Blocks					
		EN50011	Type					

4-Pole, With Screw Terminals




3	1.5	5	4	-	40E	-	MA04-S-40	...	10	0.07
3	1.5	5	3	1	31E	-	MA04-S-31	...	10	0.07
3	1.5	5	2	2	22E	-	MA04-S-22	...	10	0.07


MA04-S-40



MA04-S-31



MA04-S-22



*1 Other coil voltages - see page 4
 *2 Contacts suitable for electronic circuits, according to EN947-5-4 for rated voltage 24V DC (test ratings 17V DC, 5mA). Positively guided contacts.

Micro Contactor MA Series



IMO

Micro Contactors

AC Operated

Power Ratings	Rated Current	Aux. Contacts* ² Built-in	Additional	Type	Coil Voltage * ¹
AC2, AC3	AC1				24 24V 50/60Hz 230 220-240V 50/60Hz

380V 400V 415V kW	660V 690V kW	440V A	 NO	 NC	Type	↓	Pack pcs.	Weight kg/pc.
--	--------------------	-----------	--------	--------	------	---	--------------	------------------

3-Pole, With Screw Terminals




2.2	-	12	1	-	-	MA05-S-10	...	10	0.07
2.2	-	12	-	1	-	MA05-S-01	...	10	0.07


4-Pole, With Screw Terminals

2.2	-	12	-	-	-	MA05-S-0040	...	10	0.07
-----	---	----	---	---	---	-------------	-----	----	------


MA05-S-10




MA05-S-01



MA05-S-0040



Snap-On Adaptor



For Type	Specification	Type	Pack pcs.	Weight kg/pc.
MA	for snap mounting of Snap on Adaptor for MA accessories on 35mm DIN-Rail acc. DIN EN 50022	MA-P1039	10	0.01

*¹ Other coil voltages - see page 4*² Contacts suitable for electronic circuits, according to EN947-5-4 for rated voltage 24V DC (test ratings 17V DC, 5mA). Positively guided contacts.

Micro Contactor MA Series



IMO

Micro Contactors

AC Operated

Power Ratings	Rated Current	Aux. Contacts* ² Built-in	Additional	Type	Coil Voltage * ¹
AC2, AC3	AC1				24 24V 50/60Hz 230 220-240V 50/60Hz

380V 400V 415V kW	660V 690V kW	440V A	NO	NC	Type	↓	Pack pcs.	Weight kg/pc.
--	---------------------------	------------------	----	----	------	---	--------------	------------------

3-Pole, With Solder Pins Ø1.15 For Printed Circuit Applications


2.2	-	9	1	-	-	MA05-P-10	...	10	0.07
2.2	-	9	-	1	-	MA05-P-01	...	10	0.07

4-Pole, With Solder Pins Ø1.15 for Printed Circuit Applications


2.2	-	9	-	-	-	MA05-P-0040	...	10	0.07
-----	---	---	---	---	---	-------------	-----	----	------




MA05-P-10



MA05-P-01



MA05-P-0040



Coil Voltages for AC operated contactors

Suffix to contactor type e.g. MA05-S- 1024AC	Voltage Marking at the coil for		Rated Control Voltage U _s range for 50Hz				for 60Hz		V
	50Hz	60Hz	min.		max.	min.		max.	
	V	V	V	V	V	V	V	V	
12	12	12	11	12	12	12	12	12	
24	24	24	22	24	24	24	24	24	
42	42	42	38.5	42	42	42	42	42	
48	48	48	48	50	48	48	48	52	
90	100	100	90	100	100	100	100	105	
95	95-100	105-110	95	100	105	105	105	110	
100	100	110-115	100	105	110	110	110	115	
105	105-110	115-120	105	110	115	115	115	120	
110	110-115	120-125	110	115	120	120	120	125	
180	200	200	185	200	200	200	200	210	

Suffix to contactor type e.g. MA05-S- 10230AC	Voltage Marking at the coil for		Rated Control Voltage U _s range for 50Hz				for 60Hz		V
	50Hz	60Hz	min.		max.	min.		max.	
	V	V	V	V	V	V	V	V	
200	200	200-220	195	205	200	220	220	220	
210	205-215	220-230	205	215	220	230	220	220	
220	210-220	220-240	210	220	220	240	220	220	
230	220-230	230-250	220	230	230	250	230	230	
240	230-240		230	240	250	260	250	250	

Standard voltages in bold type letters

Operating range of magnet-coils: $0.85 \times U_s$ (min value of rated control voltage) up to $1.1 \times U_s$ (max value of rated control voltage)

Coil not exchangeable

*1 Other coil voltages - see above

*2 Contacts suitable for electronic circuits, according to EN947-5-4 for rated voltage 24V DC (test ratings 17V DC, 5mA). Positively guided contacts.

Micro Contactor MA Series



IMO

Micro Reversing Contactors, Mechanical Interlock

AC Operated

Power Ratings	Rated Current	Aux. Contacts* ² Built-in	Additional		Type	Coil Voltage * ¹		Pack pcs.	Weight kg/pc.
			on the left hand side contactor	on right hand side contactor					
AC2, AC3	AC1								
380V 400V 415V kW	660V 690V kW	440V A	NO	NC	K1 Type	K2 Type	↓		

3-Pole, With Screw Terminals




2.2	-	12	-	1	-	-	MA05-R-S-01	...	1	0.14
2.2	-	12	1	-	-	-	MA05-R-S-10	...	1	0.14

4-Pole, With Screw Terminals


2.2	-	12	-	-	-	-	MA05-R-S-0040	...	1	0.14
-----	---	----	---	---	---	---	---------------	-----	---	------

3-Pole, With Solder Pins Ø1.15 For Printed Circuit Applications




2.2	-	xxx* ³	-	1	-	-	MA05-R-P-01	...	1	0.14
2.2	-	xxx* ³	1	-	-	-	MA05-R-P-10	...	1	0.14


MA05-R-S-01



MA05-R-S-10



MA05-R-S-0040



*¹ Other coil voltages - see page 4
 *² Contacts suitable for electronic circuits, according to EN947-5-4 for rated voltage 24V DC (test ratings 17V DC, 5mA). Positively guided contacts.
 *³ Data available upon request

Micro Contactor MA Series

Data according to IEC 60947-4-1, VDE 0660, EN 60947-4-1

Main Contacts	Type	MA05-S..
Rated insulation voltage U_i	V AC	480*1
Making capacity I_{eff}	at $U_e = 440V$ AC	65
Breaking capacity I_{eff} $\cos\phi = 0.65$	400V AC	50
Utilization category AC1		
Switching of resistive load		
Rated operational current $I_e (=I_{th})$ at 40°C, open	A	12
Rated operational power of three-phase resistive loads	230V kW	4.7
50-60Hz, $\cos\phi = 1$	240V kW	4.8
	400V kW	8.3
	415V kW	8.6
	480V kW	9.5
Rated operational current $I_e (=I_{th})$ at 60°C, enclosed	A	8
Rated operational power of three-phase resistive loads	230V kW	3.1
50-60Hz, $\cos\phi = 1$	240V kW	3.3
	400V kW	5.5
	415V kW	5.7
	480V kW	6.5
Minimum cross-section of conductor at load with $I_e (=I_{th})$	mm ²	1.5
Utilization category AC2 and AC3		
Switching of three-phase motors		
Rated operational current I_e	220V A	6.2
open and enclosed	230V A	6.2
	240V A	5.6
	380-400V A	5
	415-440V A	5
	480V A	5
Rated operational power of three-phase motors	220-240V kW	1.5
50-60Hz	380-440V kW	2.2
	480V kW	2.2
Utilization category AC4		
Switching of squirrel cage motors, inching		
Rated operational current I_e	220V A	4.9
open and enclosed	230V A	4.9
	240V A	4.1
	380-400V A	3.5
	415-440V A	3.5
	480V A	3.5
Rated operational power of three-phase motors	220-240V kW	1.1
50-60Hz	380-440V kW	1.5
	480V kW	1.5

*1 Suitable at 690V for: earthed-neutral systems, overvoltage category I to III, pollution degree 3 (standard-industry): $U_{imp} = 4kV$.
Data for other conditions on request

Micro Contactor MA Series

Data according to IEC 60947-4-1, VDE 0660, EN 60947-4-1

Main Contacts			Type	MA05-S..
Utilization category DC1				
Switching of resistive load	1 pole 24V	A		12
Time constant L/R ≤ 1ms	60V	A		12
Rated operational current I _g	110V	A		-
	220V	A		-
	3 poles in series 24V	A		12
	60V	A		12
	110V	A		12
	220V	A		-
Utilization category DC3 and DC5				
Switching of shunt motors and series motors	1 pole 24V	A		12
	60V	A		-
Time constant L/R ≤ 15ms	110V	A		-
Rated operational current I _g	220V	A		-
	3 poles in series 24V	A		12
	60V	A		12
	110V	A		12
	220V	A		-
Maximum ambient temperature				
Operation	open	°C		-40 to +60 (+90)*1
	enclosed	°C		-40 to +40
with thermal overload relay	open	°C		-25 to +60
	enclosed	°C		-25 to +40
Storage		°C		-50 to +90
Short circuit protection				
for contactors without thermal overload relay				
Coordination-type “1” according to IEC 947-4-1				
Contact welding without hazard of persons	gL (gG)	A		20
max. fuse size				
Coordination-type “2” according to IEC 947-4-1				
Light contact welding accepted	gL (gG)	A		-
max. fuse size				
Contact welding not accepted				
max. fuse size	gL (gG)	A		-
For contactors with thermal overload relay the device with the smaller admissible backup fuse (contactor or thermal overload relay) determines the fuse size				
Cable cross-sections				
for contactors				
main connector	solid or stranded	mm²		0.5-1.5
	flexible	mm²		0.5-1.5
	flexible with multicore cable end	mm²		0.5-1.5
Cables per clamp				2
	solid or stranded	AWG		20-14
Frequency of operation z				
contactors without thermal overload relay	without load	1/h		10000
	AC3 I _g	1/h		600
	AC4 I _g	1/h		120
	DC3 I _g	1/h		600
Mechanical life	AC operated	S x	10 ⁶	3
	DC operated	S x	10 ⁶	xxx*2
Short time current	10s-current	A		50
Power loss per pole	at I _g /AC3 400V	W		0.2
Resistance to shock according to IEC 68-2-27				
Shick time 20ms sine-wave				
AC operated	NO	g		2.5
	NC	g		2.5

*1 With reduced control voltage range 0.9 up to 1.0 x U_g and with reduced rated current I_g/AC1 according to I_g/AC3

*2 Data on request

Micro Contactor MA Series

Data according to IEC 60947-5-1, VDE 0660, EN 60947-5-1

Auxilliary Contacts		Type	MA04-S.. MA05-S..
Rated insulation voltage	U_i	VAC	440 ^{*1}
Thermal rated current I_m bis 440V	40°C	A	5
Ambient temperature	60°C	A	3
Power loss per pole	I_{th}	W	0.25
Utilization category AC15			
Rated operational current I_g	220-240V	A	3
	380-415V	A	1.5
	440V	A	1
Utilization category DC13			
Rated operational current I_g	60V	A	0.5
			-
			-
Maximum ambient temperature			
Operation	open	°C	-40 bis to +60 (+90) ^{*2}
	enclosed	°C	-40 bis to +40
Storage		°C	-40 bis to +90
Short circuit protection			
short circuit current 1kA, contact welding not accepted max fuse size	gL (gG)	A	10
For contactors with thermal overload relay the device with the smaller admissible control fuse (contactor or thermal overload relay) determines the fuse size			
Power consumption of coils			
AC operated	inrush	VA	9
	sealed	VA	4
		W	1.8
Operation range of coils			
in multiples of control voltage U_s			0.85 - 1.1
Switching time at control voltage $U_s \pm 10\%$ ^{*3*4}			
AC operated	make time	ms	13 - 18
	release time	ms	5 - 10
	arc duration	ms	10 - 15
DC operated	make time	ms	-
	release time	ms	-
	arc duration	ms	-
Cable cross-section			
all connectors	solid	mm ²	05 - 1.5
	flexible	mm ²	0.5 - 1.5
	flexible with multicore cable end	mm ²	0.5 - 1.5
Clamps per pole			2
	solid or stranded	AWG	20 - 14

*1 Suitable at 690V for: earthed-neutral systems, overvoltage category I to III, pollution degree 3 (standard-industry): $U_{imp} = 4kV$
Data for other conditions on request

*2 With reduced control voltage range 0.9 up to $1.0 \times U_s$ and with reduced thermal rated current I_m to $I_g/AC15$

*3 Summary switching time = release time + arc duration

*4 Release time of NC make time of NO increase when suppressor units for voltage peak protection are used (Varistor, RC-units, Diode units)

*5 Data on request


Micro Contactor MA Series

For North America - Data according UL508

Main Contacts (cULus)		Type	MA05-S.. MA05-R-S..	MA04-S..
Rated operational current "General Use"		A	12	5
Rated operational power of three phase motors at 60Hz (3ph)	110-120V	hp	1/2	-
	200-208V	hp	1	-
	220-240V	hp	1	-
	277V	hp	1 1/2	-
Rated operational power of AC motors at 60Hz (1ph)	110-120V	hp	1/6	-
	200-208V	hp	1/2	-
	220-240V	hp	3/4	-
Fuse / Short circuit current		A/kA	30/5	-
Rated voltage		VAC	300	300
Auxilliary contacts (cULus)	heavy pilot duty	AC	B300	B300
	Standard pilot duty	DC	R300	R300


Motor Rating $P_n = AC4$

380/ 220/
400V 230V
kW kW




Motor Rating $P_n = AC3$

380/ 220/
400V 230V
kW kW



Breaking Current $I_a (= I_e = AC1)$

A

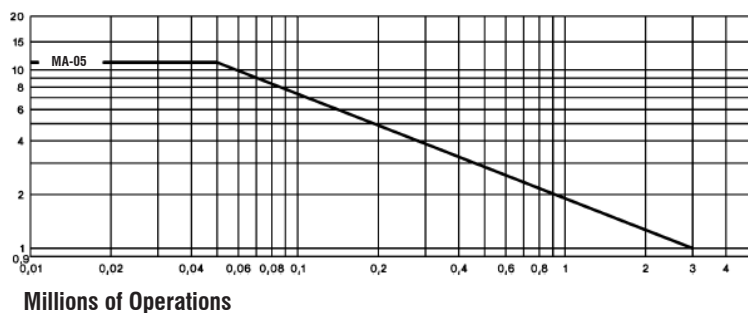



Micro Contactor MA Series

Dimensions

AC Operated
with screw terminals

MA04-S..
MA05-S..



Snap-On Adaptor MA-P1039

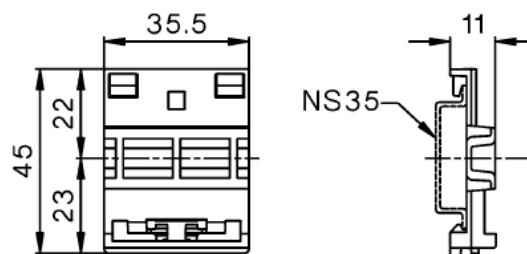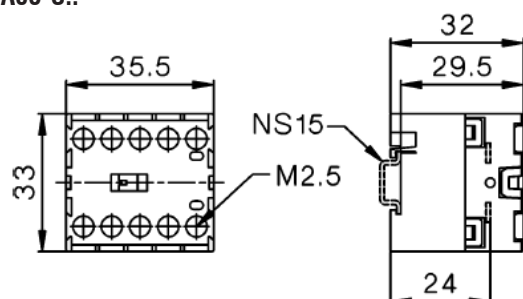

Reversing Contactors
with screw terminals

MA05-R-S..

MA..-S.. with Snap-On Adaptor MA-P1039

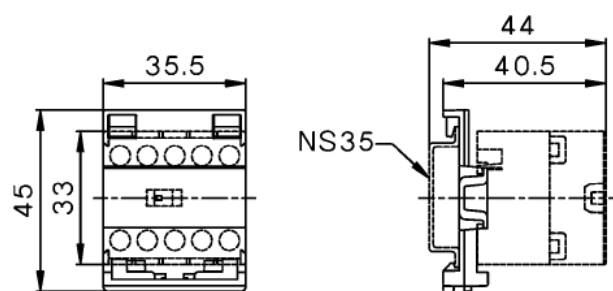
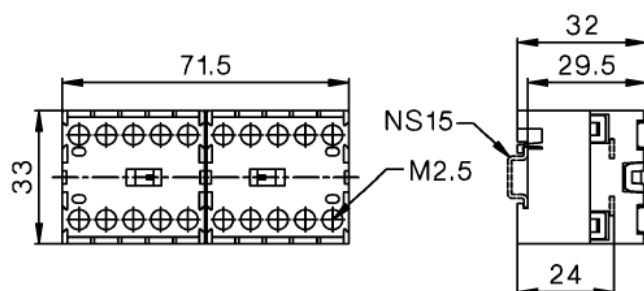


AC Operated
with solder connections

MA04-P.
MA05-P.


Reversing Contactors
with solder connections

MA05-R-S..

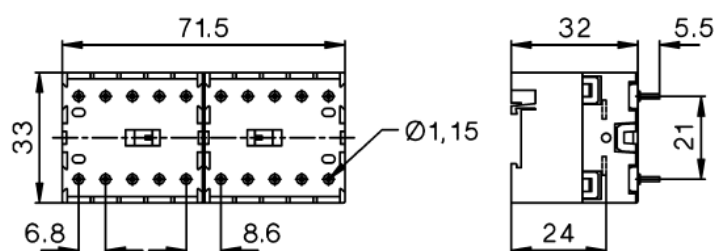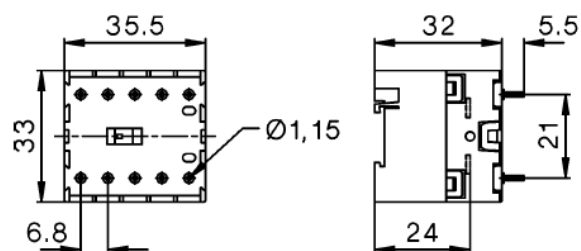

Mounting positions of contactors

MA

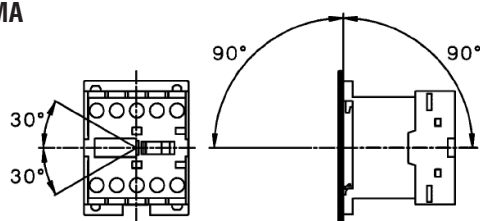

IMO Worldwide Offices

IMO Precision Controls Limited

1000 North Circular Road
Staples Corner
London NW2 7JP
United Kingdom

Tel: 020 8452 6444
Fax: 020 8450 2274
Email: imo@imopc.com
Web: www.imopc.com

IMO Canada

Unit 32 - B - North
18 Stratheam Avenue, Brampton
Ontario L6T 4Y2
Canada

Tel: 905 799 9237 (local)
Fax: 905 799 0450
Email: imo-ca@imopc.com
Web: www.imopc.com

IMO Automation LLC

101 Colony Park Drive, Suite 300
Cumming
Georgia 30040
USA

Tel: 678 679 7110
Fax: 678 679 7112
Email: imo-usa@imopc.com
Web: www.imoautomation.com

IMO Jeambrun Automation SAS


Centre D'Affaires Rocroy
30, Rue de Rocroy
94100 Saint-Maur-Des-Fosses
France

Tel: 0800 912 712 (n° gratuit)
Fax: 0145 134 737
Email: imo-fr@imopc.com
Web: www.imojeambrun.fr

IMO Automazione

Via Ponte alle Mosse, 61
50144 Firenze (FI)
Italia

Tel: 800 930 872 (toll free)
Fax: 8000 452 6445
Email: imo-it@imopc.com
Web: www.imopc.it

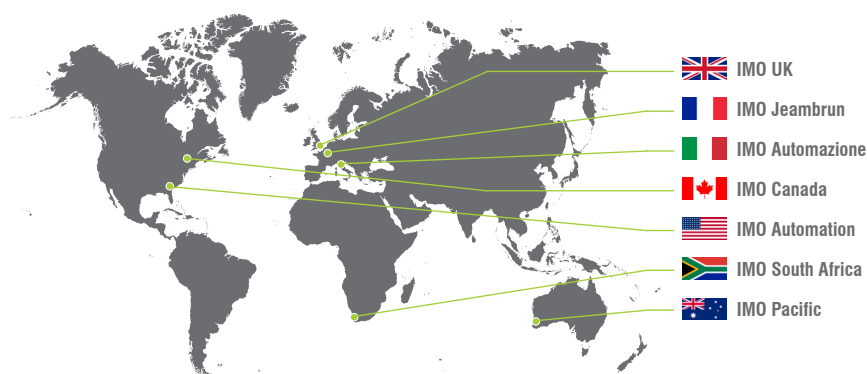

IMO South Africa (Pty) Ltd

G16 Centurion Business Park
Montague Gardens
Cape Town 7441
South Africa

Tel: 021 551 1787
Fax: 021 555 0676
Email: info@imopc.co.za
Web: www.imopc.co.za

IMO Pacific Pty Ltd

1/6 Dillington Pass
Landsdale
Perth WA 6065
Australia

Tel: 08 9302 5246 (local)
Fax: 08 9303 9908
Email: sales@imopacific.com.au
Web: www.imopacific.com.au