

UL 489 Miniature Circuit Breakers

IMO

Technical Datasheet

The IMO range of UL 489 Approved Miniature Circuit Breakers have been designed for protection of electrical installations against overload and short circuits and are manufactured in accordance with UL 489.

UL 489 MCB Features

- UL 489, IEC 60947-2 & IEC 60898-1 Compliant
- DIN Rail Mountable
- 10kA Short Circuit Capacity
- Available from 0.5Amps to 63Amps
- Suitable for Branch Circuit Device Protection
- Thermo-Magnetic Overcurrent Protection
- C & D Type Tripping Curve
- Contact Position Indicator
- RoHS Compliant

Tripping characteristics in accordance with C and D type curves

- Curve C: 5-10 I_n
- Curve D: 10-20 I_n



Options & Ordering Codes

Series		Operating Characteristic		Rated Current Amps	
UL MCB 10kA	UB10	C		10	
		D		16A	
		C		10	
		D		16A	
Poles		Poles		Poles	
10		Single Pole		10	
20		Two Pole		20	
30		Three Pole		30	

Specifications

In accordance with	UL 489, IEC 60947-2 & IEC 60898-1
Pole composition	1P, 2P, 3P
Tripping Curve	C, D
Calibration temperature	+104°F (+40°C)
Rated operational current	0.5 to 63A
AC rated operational voltage	1P: 277V AC, 2P/3P: 480Y/277V AC
DC rated operational voltage	1P: 48V DC, 2P: 96V DC
Rated operational frequency	50/60Hz
Rated short circuit breaking capacity	10kA
Mechanical lifetime	20,000 operations
Electrical lifetime	6,000 operations
Fastening torque	2.5 Nm (22.2 lb/in)
Wire Range	AWG 18-3 (0.82 to 26.7mm ²)
Mounting	DIN Rail EN 60715 (EN 50022)
Protection degree	NEMA 1 (IP20)
Operating temperature	-13°F to +131°F (-25°C to +55°C)

Selection Chart

Type	C Operating Characteristics			D Operating Characteristics		
	1	2	3	1	2	3
Poles	1	2	3	1	2	3
Rated Current (Amps)	0.5	✓	✓	✓	✓	✓
	1	✓	✓	✓	✓	✓
	1.6	✓	✓	✓	✓	✓
	2	✓	✓	✓	✓	✓
	3	✓	✓	✓	✓	✓
	4	✓	✓	✓	✓	✓
	5	✓	✓	✓	✓	✓
	6	✓	✓	✓	✓	✓
	7	✓	✓	✓	✓	✓
	8	✓	✓	✓	✓	✓
	10	✓	✓	✓	✓	✓
	13	✓	✓	✓	✓	✓
	15	✓	✓	✓	✓	✓
	16	✓	✓	✓	✓	✓
	20	✓	✓	✓	✓	✓
	25	✓	✓	✓	✓	✓
	30	✓	✓	✓	✓	✓
	32	✓	✓	✓	✓	✓
	40	✓	✓	✓	✓	✓
	50	✓	✓	✓	✓	✓
	63	✓	✓	✓	✓	✓
Weight (lb/pc)	0.275	0.55	0.825	0.275	0.55	0.825
Weight (kg/pc)	0.125	0.25	0.37	0.125	0.25	0.37
Packing (Qty)	12	6	4	12	6	4

UL 489 Miniature Circuit Breakers

IMO

Technical Datasheet

Accessories

Auxiliary Contact	UB10-AC11
For monitoring the status of the protection device (open/closed)	
1 pole changeover	
Rated current: 6A @ 240VAC & 24VDC, 2A @ 48VDC, 1A @ 125VDC	

Shunt Trip	UB10-SH-110
Shunt Trip to remotely switch off the protection device	
Rating voltage Ue: AC 110V	

Shunt Trip	UB10-SH-230
Shunt Trip to remotely switch off the protection device	
Rating voltage Ue: AC 230V	


Undervoltage Trip	UB10-UV-110V
For protection of the device when the rated voltage drops below 50%	
Rating voltage Ue: AC 110V	

Undervoltage Trip	UB10-UV-230V
For protection of the device when the rated voltage drops below 50%	
Rating voltage Ue: AC 230V	

Alarm Contact	UB10-AL11
To facilitate the ability to have an audible alarm when the MCB trips	
Rated Current: 3A @ 400VAC, 6A @ 230VAC	

Locking Device	UBLO
-----------------------	-------------

Dimensions (mm) Miniature Circuit Breakers

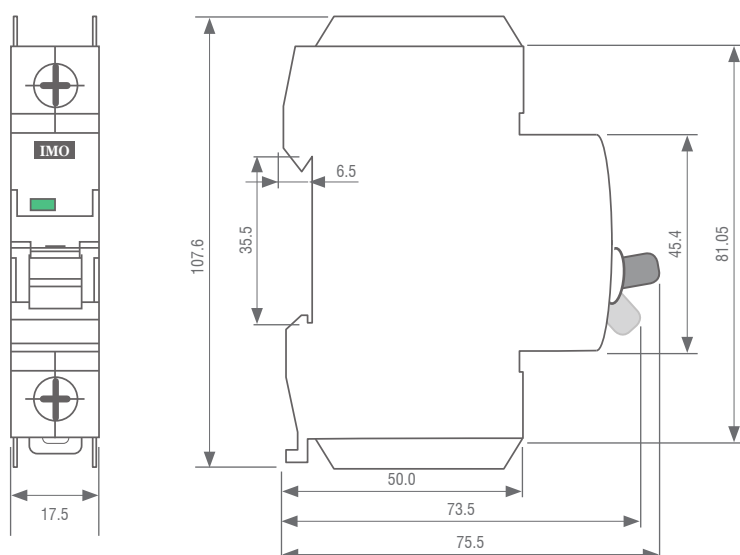

C & D Tripping Curve

