

CPE Plastic Distribution Box

Key Features

- Fully enclosed with transparent snap latch door cover
- PVC, flame retardant, temperature rise, impact resistant, UV resistant, engineering material
- Raised DIN Rail improves cable routing
- Independent N and PE wiring blocks inside
- Circular M20 cable entry knockouts, 2 on top and 2 on bottom
- Complies with IEC61439
- IP65 protection rating
- Optional plastic blanking modules (CPE-BLANK)



Options & Ordering Codes

CPE - 04	
Series	
Compact Plastic Enclosure	CPE
Number of Modules	
4 Modules	04
6 Modules	06
9 Modules	09
12 Modules	12
18 Modules	18
24 Modules	24
36 Modules	36

Specifications

Construction Material	Plastic
Protection Rating	IP65
Colour	Grey
Operating environment temperature	-25°C~+55°C
Installation altitude	<2000m
Storage environment temperature	-40°C~+70°C
Storage relative humidity	35%~75%
Environmental Pollution Level	3

Accessories


CPE-BLANK	Plastic Blanking Modules
-----------	--------------------------

CPE Plastic Distribution Box

IMO

Technical Datasheet

Dimensions (mm) 4 Modules

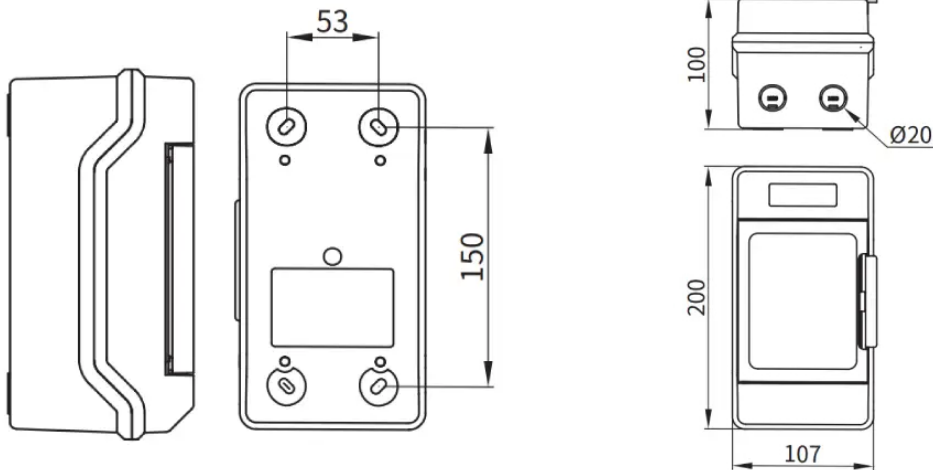

It should be installed in an environment without severe impact or vibration
The installation position should be horizontal, with a tilt angle of less than 5 °